
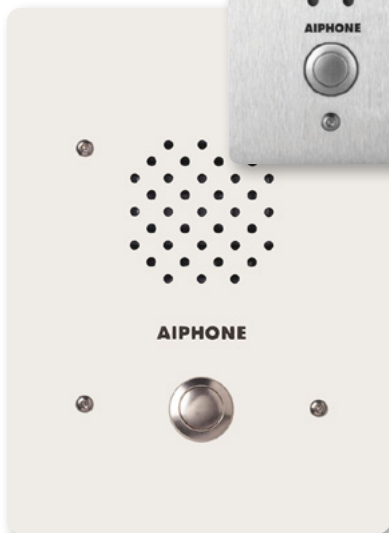


LEM-1DL Series

Communication and Entry Security System



Homes | Offices | Schools | Industrial Facilities

Components - Mix and match up to 1 door station and 4 master stations

Door Stations - Select 1



LE-D
Audio Only
Door Station

- Plastic cover
- Surface mount
- Fits 1-gang box

4-3/4" H
3-7/16" W
1-1/8" D



LE-SS-1G
Audio Only
Door Station

- Stainless steel
- Flush mount
- Fits 1-gang box

4-1/2" H
2-3/4" W
2-1/2" D
(back box depth)



LE-DA
Audio Only
Door Station

- Stainless steel faceplate
- Flush mount
- Fits 2-gang box

4-1/2" H
4-9/16" W
2-1/2" D
(back box depth)



LE-SS/A
Audio Only
Door Station

- Stainless steel
- Flush mount
- Fits 2-gang box

4-3/4" H
4-3/4" W
2-1/2" D
(back box depth)



LE-SSR
Audio Only
Door Station

- Red mushroom call button
- Stainless steel
- Flush mount
- Fits 2-gang box

4-3/4" H
4-3/4" W
2-1/2" D
(back box depth)



LE-SSV
Audio Only
Door Station

- Built-in CCTV camera
- Stainless steel
- Flush mount
- Fits 2-gang box

4-3/4" H
4-3/4" W
2-1/2" D
(back box depth)



LS-NVP/C
Audio Only
Door Station

- Powder-coated steel
- Flush mount
- Fits 3-gang box

7-1/2" H
5-1/2" W
2-1/2" D
(back box depth)

NOTE: Aiphone recommends a 2-1/2" minimum back box depth for all flush mount door stations

Master Stations - Select up to 4



LEM-1DL
Audio Only
Master Station
(Requires 1 DAK-2S per every 2 master stations in the system)

- Door release button
- Surface mount

7-1/16" H
5-5/8" W
2-1/8" D



LEM-1DLC
Audio Only
Master Station

- Multi-master (max. 4)
- Door release button
- Surface mount

7-1/16" H
5-5/8" W
2-1/8" D

Starter Kit - Includes door station, master station, and power supply
(Up to 3 additional master stations can be installed for door answering)

Start small,
expand later!



LEM-1DLS
Box Set Starter Kit Includes:

- 1 LEM-1DL Master Station
- 1 LE-D Door Station
- 1 PT-1210N Transformer


Power Supply



PT-1210N
12V AC
Transformer
(1 required per master station)



SBX-2BV
Vertical Surface Mount Box
for HID-SS and one LE-DA,
LE-SS/A, LE-SSR, or LE-SSV



SBX-2BH
Horizontal Surface Mount Box
for HID-SS and one LE-DA,
LE-SS/A, LE-SSR, or LE-SSV

Accessories




HID-SS
Card Access Station with
HID® ProxPoint® Plus Proximity
Card Reader




ICP-BR
Brass
Faceplate
for LE-DA



ICP-AB
Antique Brass
Faceplate
for LE-DA



SBX-1G
Surface
Mount Box
for LE-SS-1G



SBX-2G
Surface
Mount Box
for LE-DA,
LE-SS/A,
LE-SSR, or
LE-SSV



SBX-NVP
Surface
Mount Box
for LS-NVP/C



BBX-1E
Back Box
for Flush
Mounting
LE-B or LE-BN



DAK-2S
Dual Master
Adaptor Kit

Specifications

Spec	Model	LEM-1DL, LEM-1DLC
Power Source		12~16V AC - use PT-1210N, 12~24V DC, 200mA
Output		100mW
Wire		2 cond., overall shield (Aiphone wire #822202 or 821802)
Wire Distance		Door station to farthest master station: 650' (22AWG) 1,600' (18AWG)



EL-12S
12V AC/DC,
200mA Electric
Door Strike
(Requires PT-1210N)




PT-1210N
12V AC
Transformer
(Required for EL-12S)



RY-18L
Form
C Door
Release
Relay

LEM-1DL
Series
Brochure
07/2013



GS-35F-0065L

ISO-14001 Certified



Aiphone Co. Ltd.

ISO 9001:2008 Certified



Aiphone Corp.

Deming Prize



Aiphone Co. Ltd.